


U4153 Receptor TDT - 12/24 VDC



Rear

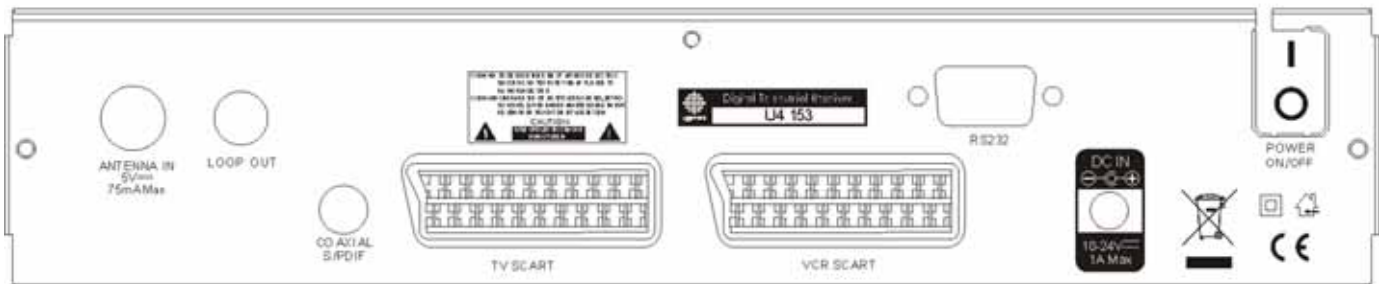

U4153 Receptor TDT - 12/24 VDC	
VIDEO	
Decoding Bit rate Output Aspect ratio Active pixel Output connector	Compatible MPEG-2 & MPEG-1 Max 15Mbps PAL/NTSC 4:3, 16:9, Auto 720x480 @ 30fps; 720x576 @25fps Euroconnector X2
AUDIO	
Decoding Sampling rate Output connector	MPEG-2/MPEG -1 Layer I & II 32 /44,1/ 48 Khz Euroconnector X2, SPDIF coaxial
DEMODULATION	
Demodulation Guard	COFDM 2k, 8k 1/4, 1/8 , 1/16, 1/32
INPUT SIGNAL	
Frequency Input Level	VHF-UHF - 78 dBm – 20 dBm
MISCELLANEOUS	
Supply voltage Power consumption Stand-by power consumption (Low Power Consumption mode) Operation temperature Storage temperature Dimension (W x D x H) Weight	12-24 VDC TYP. 21 watts / Máx. 30 watts < 3 watts +5° à +40° -20° à +70° 280x190x55 mm 1.3Kg